# **CBSE Sample Question Paper Term 1**

**Class - XII (Session : 2021 - 22)** 

# SUBJECT - PHYSICS 042 - TEST - 03

Class 12 - Physics

### Time Allowed: 1 hour and 30 minutes

**Maximum Marks: 35** 

### **General Instructions:**

- 1. The Question Paper contains three sections.
- 2. Section A has 25 questions. Attempt any 20 questions.
- 3. Section B has 24 questions. Attempt any20 questions.
- 4. Section C has 6 questions. Attempt any 5 questions.
- 5. All questions carry equal marks.
- 6. There is no negative marking.

#### Section A


# Attempt any 20 questions

- 1. Point charges +4q, -q and +4q are kept on the X-axis at points x = 0, x = a and x = 2a **[0.77]** respectively:
  - a) all the charges are in unstable equilibrium
- b) all the charges are in stable equilibrium
- c) none of the charges is in equilibrium
- d) only q is in stable equilibrium
- 2. To make a condenser of  $16\mu F$ , 1000 volts, how many condensers are needed which have written on them " $8\mu F$ , 250 volts"?
  - a) 8

b) 32

c) 40

- d) 2
- 3. A current of 0.25 A flows in the main circuit. Now, the resistance R is disconnected and then connected across the 4  $\Omega$  resistance. Current in the circuit is:



a)  $\frac{1}{19}A$ 

b)  $\frac{2}{9}A$ 


c)  $\frac{1}{2}A$ 

- d) 1 A
- 4. Hollow spherical conductor with a charge of 500 C is acted upon by a force 562.5 N. What is **[0.77]** E at its surface?
  - a) Zero

b)  $4.5 imes 10^{-4} NC^{-1}$ 

c) 1.125 NC<sup>-1</sup>

d)  $2.25 imes 10^6 NC^{-1}$ 

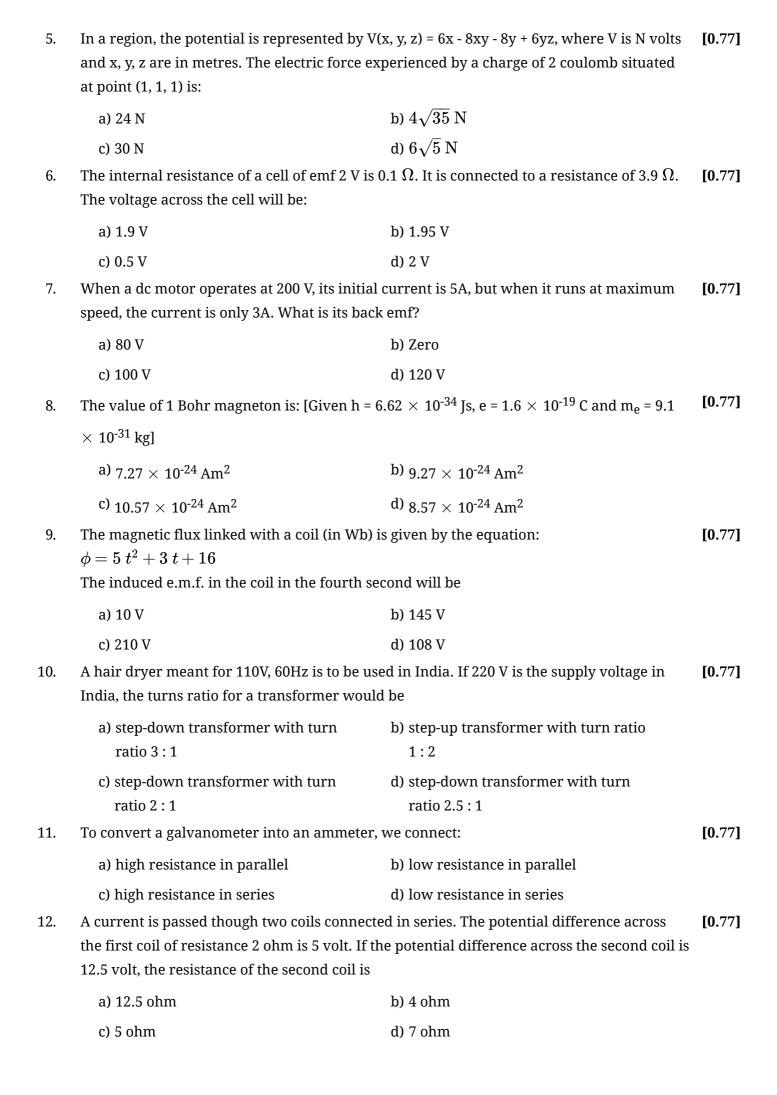

13.	The working of a dynamo is based on the principle of		[0.77]
	a) Chemical effect of current	b) Electromagnetic induction	
	c) Magnetic effect of current	d) Heating effect of current	
14.	A series circuit consists of an ac source of variable frequency, a 115.0 $\Omega$ resistor, a 1.25 $\mu$ F capacitor, and a 4.50-mH inductor. Impedance of this circuit when the angular frequency of the ac source is adjusted to twice the resonant angular frequency is		
	a) 146 $\Omega$	b) 176 $\Omega$	
	c) 166 $\Omega$	d) 156 $\Omega$	
15.	If a charge $q$ is placed at the centre of the line joining two equal charges $Q$ such that the system is in equilibrium, then the value of $q$ is :		
	a) $-\frac{Q}{2}$	b) $\frac{Q}{4}$	
	c) $-\frac{Q}{4}$	b) $\frac{Q}{4}$ d) $\frac{Q}{2}$	
16.	If the charge on a capacitor is increased by 2 coulomb, the energy stored in it increa 21%. The original charge on the capacitor (in coulomb) is -		
	a) 30	b) 20	
	c) 40	d) 10	
17.	In the following diagram which particle has the highest $\frac{e}{m}$ value?		
	A A		
	В		
	D		
	a) D	b) C	
	c) A	d) B	
18.	If C and R denote capacitance and resistance, then dimensions of CR are		
	a) $[M^0LT^0A^1]$	b) [MLT <sup>0</sup> A <sup>2</sup> ]	
	c) $[M^0L^0TA^0]$	d) [ML <sup>0</sup> TA <sup>-2</sup> ]	
19.	The susceptibility of a magnetic substance is found to depend on temperature and the strength of the magnetising field. The material is a:		
	a) diamagnet	b) superconductor	
	c) ferromagnet	d) paramagnet	
20.	Capacitors are used in electrical circuits when	re appliances need more:	[0.77]
	a) watt	b) resistance	
	c) voltage	d) current	
21.	If a charge q is placed at the centre of the line joining two equal like charges Q such that the system is in equilibrium, then the value of q is:		

a)	-Q
	2

d)  $\frac{-\zeta}{4}$ 

22. A current I =  $I_0 \sin(\omega t + \pi/2)$  flows in a circuit across which an alternating potential E =  $E_0$  [0.77]  $\sin \omega t$  is applied. The power consumed in the circuit is

a) 
$$E_0 I_0 / 2$$

b)  $E_0 I_0$ 

c) E

d) zero

23. Current in a circuit falls from 5 A to 0 A in 0.1 s. If an average emf of 200 V is induced, the self-inductance of the circuit is

a) 5H

b) 4H

c) 2H

d) 3H

24. A magnet of magnetic moment M is suspended in a uniform magnetic field B. The maximum value of torque acting on the magnet is

a) zero

b) MB

c) 2MB

d)  $\frac{1}{2}MB$ 

25. A galvanometer of resistance  $25\Omega$  is shunted by a  $2.5\Omega$  wire. The part of total current I $_0$  [0.77] that flows through the galvanometer is given by

a) 
$$\frac{I}{I_0} = \frac{2}{11}$$

b) 
$$\frac{I}{I_0} = \frac{4}{11}$$

c) 
$$\frac{I}{I_0} = \frac{1}{11}$$

d) 
$$\frac{I}{I_0} = \frac{3}{11}$$

#### **Section B**

# Attempt any 20 questions

26. A beam of cathode rays is subjected to crossed electric (E) and magnetic fields (B). The fields are adjusted such that the beam is not deflected. The specific charge of the cathode rays is given by where V is the potential difference between cathode and anode.


a) 
$$\frac{E^2}{2VB^2}$$

b) 
$$\frac{B^2}{2VE^2}$$

c) 
$$\frac{2VE^2}{2B^2}$$

d) 
$$\frac{2VB^2}{E^2}$$

27. Four electric charges + q, + q, -q and - q are placed at the corners of a square of side 2 L (see **[0.77]** figure). The electric potential at point A, midway between the two charges + q and + q is




b) 
$$\frac{1}{4\piarepsilon_0} \frac{2q}{L} (1+\sqrt{5})$$


c) 
$$\frac{1}{4\pi\varepsilon_0} \frac{2q}{L} \left(1 + \frac{1}{\sqrt{5}}\right)$$

d) 
$$\frac{1}{4\pi\varepsilon_0}\frac{2q}{L}\left(1-\frac{1}{\sqrt{5}}\right)$$

28. A conducting sphere of radius 10 cm is charged with 10  $\mu$ C. Another uncharged sphere of radius 20 cm is allowed to touch it for some time. After that if the spheres are separated,

	then surface density of charges on the spher	es will be in the ratio of	
	a) 1:1	b) 2:1	
	c) 1:3	d) 1:2	
29.	A transformer has 500 primary turns and 10 secondary turns. If the secondary has a resistive load of 15 $\Omega$ , the currents in the primary and secondary respectively, are		[0.77]
	a) $3.2 \times 10^{-3}  \text{A}$ , $3.2 \times 10^{-3}  \text{A}$	b) $3.2 \times 10^{-3}$ A, $0.16$ A	
	c) $0.16 \text{ A}, 3.2 \times 10^{-3} \text{ A}$	d) 0.16 A, 0.16 A	
30.	A wire loop is rotated in a magnetic field. The frequency of change of direction of the induced emf is:		[0.77]
	a) four times per revolution	b) twice per revolution	
	c) six times per revolution	d) once per revolution	
31.	In the magnetic meridian of a certain place,	the horizontal component of the earth's	[0.77]
	magnetic field is $0.26~G$ and the dip angle is $60^{\circ}$ . What is the magnetic field of the earth at this location?		
	a) 0.52 G	b) 0.58 G	
	c) 0.65 G	d) 0.62 G	
32.	A square loop of wire of each side 50 cm is kept so that its plane makes an angle $\theta$ with a uniform magnetic field of induction IT. The magnetic field is withdrawn in 0.1 s. It is found that the induced emf across the loop is 125 mV. The angle $\theta$ is:		[0.77]
	a) <sub>45</sub> °	b) 60°	
	c) 90°	d) 30°	
33.	The mobility of charge carriers increases with:		[0.77]
	a) increase in the average collision time	b) increase in the mass of the charge carriers	
	c) the decrease in the charge of the mobile carriers	d) increase in the electric field	
34.	If the potential of a capacitor having capacity 8 pF is increased from 10 V to 20 V, then increase in its energy will be:		[0.77]
	a) $12 \times 10^{-4}  \text{J}$	b) $4 \times 10^{-6}$ J	
	c) 12 × 10 <sup>-6</sup> J	d) $_{4} \times 10^{-4}$ J	
35.	An electric kettle boils some water in 16 min. Due to some defect, it becomes necessary to remove 10% turns of the heating coil of the kettle. Now, how much time will it take to boil the same amount of water?		[0.77]
	a) 19.6 min	b) 14.4 min	
	c) 15.0 min	d) 12.7 min	
36.	An inductor with L = 9.50 mH is connected a	cross an ac source that has voltage amplitude	[0.77]

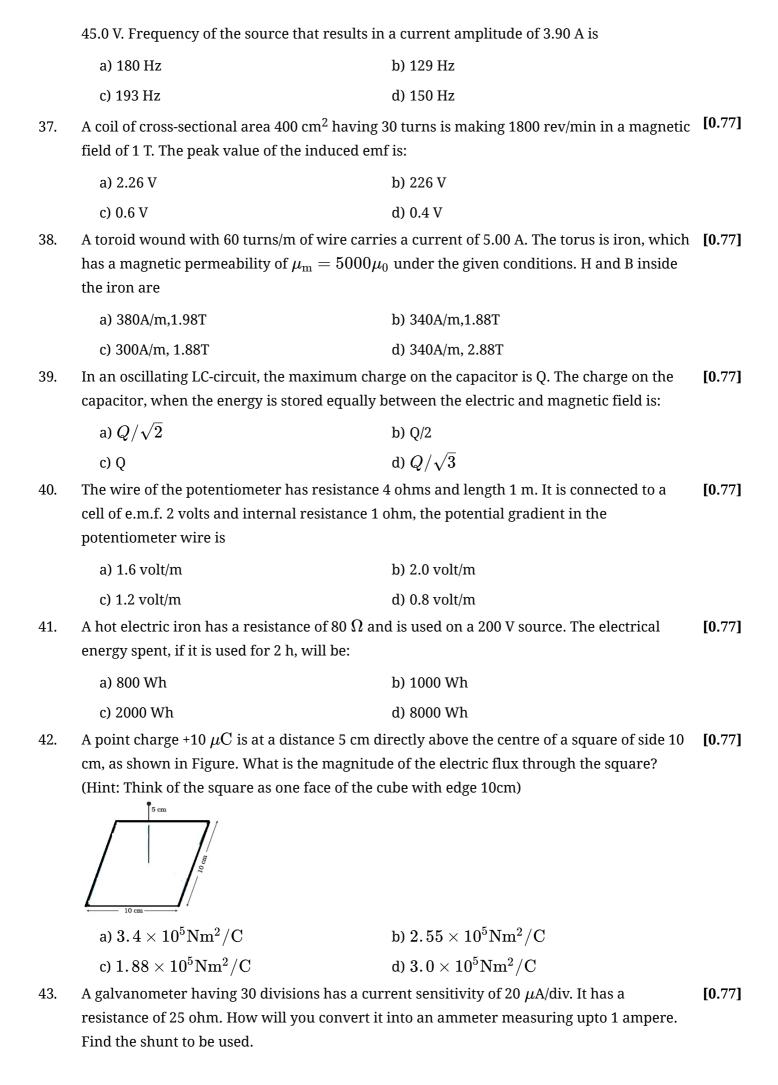

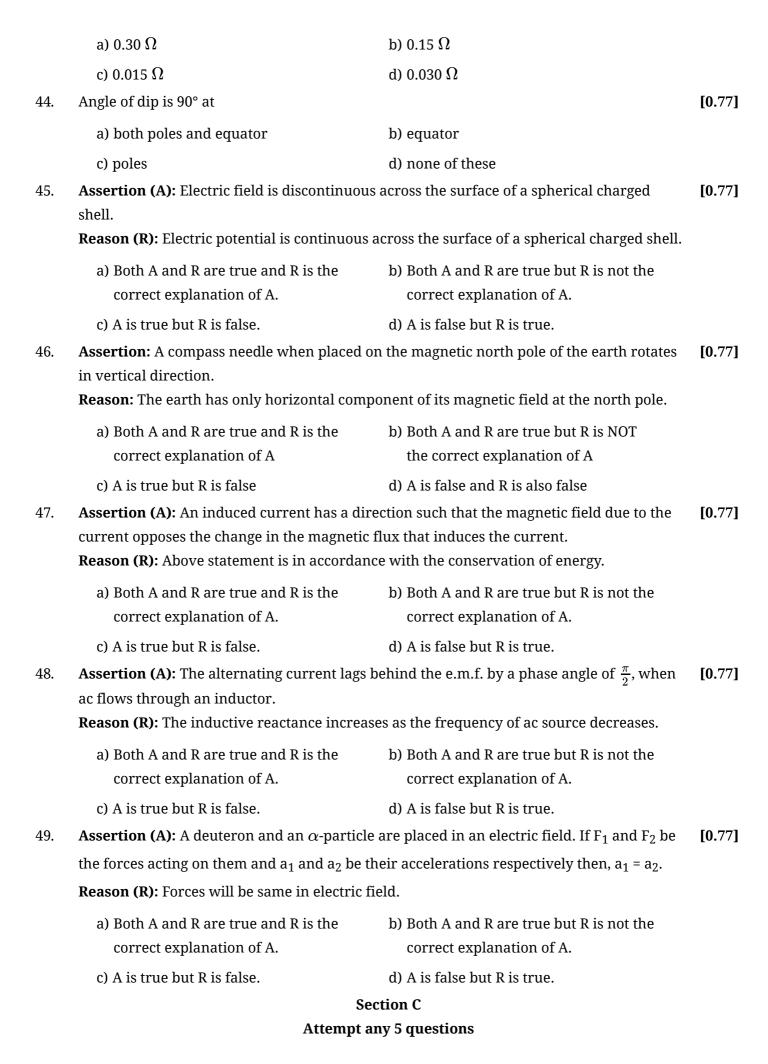

50.	Dielectric polarization is the phenomenon, in which atomic dipoles are aligned		[0.77]
	<ul><li>a) at an acute angle to the direction of the electric field</li></ul>	b) perpendicular to the direction of the electric field	
	c) in the direction of the electric field	d) opposite to the direction of the electric field	
51.	Each of the two-point charges are doubled a becomes n times, where n is	and their distance is halved. Force of interaction	n <b>[0.</b> 77 <b>]</b>
	a) 1	b) 18	
	c) 16	d) 4	
Accordance conductions the conduction conduction conduction conductions are conductions as a conduction conduction conduction conduction conduction conductions are conductions as a conduction conduction conduction conduction conduction conductions are conductions as a conduction conduc	stions:  ording to Ohm's law, the current flowing throential difference across the ends of the conductor. Electrical resistance of a conductor is tric current through it. It depends upon lengt	ext. Read the text carefully and answer the ugh a conductor is directly proportional to the ctor i.e., I $\propto V \Rightarrow \frac{V}{I}$ = R, where R is resistance the obstruction posed by the conductor to the finance of cross-section, nature of material and $\frac{l}{A}$ or R = $\rho \frac{l}{A}$ , where $\rho$ is electrical resistivity of	low of
52.	Dimensions of electric resistance is		[0.77]
	a) $[M^{-1}L^{-2}T^{-1}A]$	b) $[M^{-1}L^2T^2A^{-1}]$	
	c) [ML <sup>2</sup> T <sup>-2</sup> A <sup>-2</sup> ]	d) [ML <sup>2</sup> T <sup>-3</sup> A <sup>-2</sup> ]	
53.	If 1 $\mu$ A current flows through a conductor when potential difference of 2 volt is applied across its ends, then the resistance of the conductor is		[0.77]
	a) $5 imes 10^7\Omega$	b) 1.5 $ imes$ 10 $^5$ $\Omega$	
	c) $2 imes 10^6\Omega$	d) 3 $ imes$ 10 $^5\Omega$	
54.	Specific resistance of a wire depends upon		[0.77]
	a) mass	b) none of these	
	c) cross-sectional area	d) length	
55.	The slope of the graph between potential difference and current through a conductor is		[0.77]
	a) first straight line then curve	b) curve	
	c) a straight line	d) first curve then straight line	

# **Solution**

# SUBJECT - PHYSICS 042 - TEST - 03

# Class 12 - Physics

## **Section A**

(a) all the charges are in unstable equilibrium 1.

**Explanation:** The net force on each charge is zero. Therefore, all the charges are in equilibrium. If we slightly displace the charge -q to the right, the net force of attraction will further displace it to the right i.e., away from its mean positive. The equilibrium is, therefore, unstable.

2. **(b)** 32

**Explanation:** Each capacitor of capacitance  $8\mu F$  can withstand a maximum potential of 250 V.

When equal capacitors are connected in series, the potential difference across them is equal.

If there are 'm' capacitors in series such that the potential across each is 250 V, then,

$$\frac{1000}{m} = 250; m = 4$$

The equivalent capacitance of 4 capacitors connected in series is  $C_S=rac{C}{m}=rac{8}{4}=2\mu F$ 

To achieve a capacitance of 16, 'n' such rows of capacitors need to be connected in parallel.

$$C_{eq} = nC_S = 16 \mu F \ n = rac{16}{C_S} = rac{16}{2} = 8$$

$$n = \frac{16}{C_S} = \frac{16}{2} = 8$$

To make a condenser of 16  $\mu F$ , 8 rows of capacitors with each row containing 4 capacitors are to be connected.

The total number of capacitors =  $n \times m = 4 \times 8 = 32$ 

3. (d) 1 A

**Explanation:** In first case, R + 4 = 
$$\frac{2V}{0-25A}=8\Omega$$

$$\therefore$$
  $R=4\Omega$ 

When R is connected across 4  $\Omega$  resistance,

$$R'=rac{4 imes4}{4 imes4}=2\Omega$$

$$R'=rac{4 imes4}{4+4}=2\Omega$$
  
 $\therefore I=rac{V}{R'}=rac{2 ext{ V}}{2\Omega}$  = 1 A

4. (c) 1.125 NC<sup>-1</sup>

Explanation: 
$$E = \frac{F}{q}$$

Explanation:  $E=rac{F}{q}$  Putting values,  $E=rac{562.5}{500}$  = 1.125 NC $^{-1}$ 

**(b)**  $4\sqrt{35} \; {
m N}$ 5.

**Explanation:** 
$$V = 6x - 8xy - 8y + 6yz$$

At the point (1, 1, 1), we have

$$E_x = -\frac{\partial V}{\partial x}$$
 = -(6 - 8y) = 2

$$E_y = -\frac{\partial V}{\partial x} = -(-8x - 8 + 6z) = 10$$

$$E_2 = -rac{\partial V}{\partial z}$$
 = -6y = -6

At the point (1, 1, 1), we have 
$$E_x = -\frac{\partial V}{\partial x}$$
 = -(6 - 8y) = 2  $E_y = -\frac{\partial V}{\partial y}$  = -(-8x - 8 + 6z) = 10  $E_2 = -\frac{\partial V}{\partial z}$  = -6y = -6  $E = \sqrt{E_x^2 + E_y^2 + E_z^2} = \sqrt{4 + 100 + 36} = \sqrt{140}$  =  $2\sqrt{35}$ NC<sup>-1</sup>

$$=2\sqrt{35}\mathrm{NC}^{-1}$$

$$F=qE=2 imes2\sqrt{35}=4\sqrt{35}\;\mathrm{N}$$

**(b)** 1.95 V 6.

**Explanation:** V = 
$$\frac{\varepsilon R}{R+r} = \frac{2 \times 3.9}{3.9+0.1} = 1.95 \text{ V}$$

7. (a) 80 V

> **Explanation:** The induced e.m.f. acts in opposite direction to the applied voltage V (Lenz's law) and in known as back or counter e.m.f.

$$i=rac{V}{R} \ R=rac{V}{i}=rac{200}{5}=40\Omega$$

When motor is at its maximum speed it operates at

$$V = iR = 3 imes 40 = 120V$$

i.e. back emf or oppose to applied voltage = 200 - 120 = 80V

8. **(b)**  $9.27 \times 10^{-24} \,\mathrm{Am^2}$ 

Explanation: 1 Bohr magneton

$$= \frac{eh}{4\pi m_e}$$

$$= \frac{1.6 \times 10^{-19} \times 6.62 \times 10^{-34}}{4\pi \times 9.1 \times 10^{-31}}$$

$$= 9.27 \times 10^{-24} \text{ Am}^2$$

9. **(a)** 10 V

**Explanation:** As induced emf, 
$$|e| = \frac{d\phi}{dt}$$
 $= \frac{d}{dt} (5t^2 + 3t + 16)$  $= 10t + 3$ 

So, at 
$$t = 3s, induced \mid e \mid is = 10 \times 3 + 3 = 33V$$
  
So, at  $t = 4s, induced \mid e \mid is = 10 \times 4 + 3 = 43V$ 

Therefore emf induced in the fourth second s given by =43-33=10V

10. **(c)** step-down transformer with turn ratio 2:1

**Explanation:** The ratio between the number of primary turns to the number of secondary turns being called the "turns ratio" or "transformer ratio".

Thus, 
$$rac{N_p}{N_s}=rac{V_p}{V_s}\Big(=rac{input}{output}\Big)$$
  $rac{N_p}{N_s}=rac{220}{110}=rac{2}{1}$  Turn ratio is  $N_p:N_s=2:1$ 

As  $N_p > N_s$ , hence it is a step down transformer.

11. **(b)** low resistance in parallel

**Explanation:** To convert a galvanometer into an ammeter, we connect a low resistance in parallel with it.

12. **(c)** 5 ohm

**Explanation:** If coils are connected in series then current through each coils must be same.

Given potential difference across first coils with resistance  $2\Omega$  is 5 V.

$$\therefore I = \frac{V}{R}$$

$$\Rightarrow I = \frac{5}{2} = 2.5A$$

Same current must flow through second coil. Potential difference across second coil is,

$$V_2 = 12.5 V \ \therefore R_2 = rac{V_2}{I} \ \Rightarrow R_2 = rac{12.5}{2.5} \ R_2 = 5 \ ohm$$

13. **(b)** Electromagnetic induction

**Explanation:** Electromagnetic induction

14. **(a)** 146  $\Omega$ 

Explanation: 
$$R=115\Omega$$
  $C=1.25 \mu F=1.25 \times 10^{-6} F$   $L=4.5 mH=4.5 \times 10^{-3} H$  Resonant angular frequency,  $\omega_0=\frac{1}{\sqrt{LC}}=\frac{1}{\sqrt{4.5 \times 10^{-3} \times 1.25 \times 10^{-6}}}=\frac{1}{7.5 \times 10^{-5}}$ 

Given that the angular frequency of the ac source,  $\omega=2\omega_0=rac{2}{7.5 imes10^{-5}}=26666.6 rad/s$  impedance,

$$Z = \sqrt{R^2 + \left(\omega L - rac{1}{\omega C}
ight)^2} = \sqrt{115^2 + \left[\left(26666.6 imes 4.5 imes 10^{-3}
ight) - \left(rac{1}{26666.6 imes 1.25 imes 10^{-6}}
ight)
ight]^2}$$
  $Z = 146\Omega$ 

15. **(c)** 
$$-\frac{Q}{4}$$

## **Explanation:**

Two equal charges of Q each are placed at the points A and B at a distance r apart and the charge q, at the centre C of the line joining the two equal charges as shown in the figure.

Let us first consider the equilibrium of the charge Q placed at point A. Let  $F_B$  and  $F_C$  be the forces on it due to the charges at the points B and C. For the equilibrium of charge Q at the point A, the net force on it must be zero i.e.

$$\begin{aligned} &F_B + F_C = 0 \\ &\frac{1}{4\pi\varepsilon_0} \cdot \frac{Q \times Q}{r^2} + \frac{1}{4\pi\varepsilon_0} \cdot \frac{Q \times q}{(r/2)^2} = 0 \\ &\text{or } Q + 4 \ q = 0 \\ &\text{or } q = -\frac{Q}{4} \end{aligned}$$

It follows that the forces due to charges at the points A and B on the charge q are equal and opposite and hence it will also be in equilibrium.

16. **(b)** 20

**Explanation:** The initial energy of the capacitor of capacitance C and charge  $\mathsf{Q}_1$  is  $U_1=rac{Q_1^2}{2C}$ 

When the charge increases to Q<sub>2</sub>, the energy of the capacitor  $\frac{U_2-U_1}{U_1}=\frac{Q_2^2-Q_1^2}{Q_1^2}$ 

Given percentage increase of energy  $rac{U_2-U_1}{U_1}=0.21$ 

$$egin{array}{l} dots & rac{Q_2^2 - Q_1^2}{Q_1^2} = rac{Q_2^2}{Q_1^2} - 1 \ \Rightarrow 0.21 = & rac{Q_2^2}{Q_1^2} - 1 \ \Rightarrow 1.21 = & rac{Q_2^2}{Q_1^2} \ \Rightarrow & rac{Q_2}{Q_1} = 1.1 \end{array}$$

But  $Q_2-Q_1=2; Q_2=1.1Q_1$ 

On solving, we get initial charge on capacitor is,  $Q_1 = 20C$ 

17. **(a)** D

**Explanation:** Here  $evB = \frac{mv^2}{r}$  or  $\frac{e}{m} = \frac{v}{rB}$ 

For same v and B ,  $\frac{e}{m} \propto \frac{1}{r}$ 

The radius of curvature is minimum for D. Hence its  $\frac{e}{m}$  is highest.

18. **(c)**  $[M^0L^0TA^0]$ 

Explanation: CR is the time constant of CR-circuit.

$$\therefore [CR] = \left[ M^0 L^0 T A^0 \right]$$

19. **(d)** paramagnet

**Explanation:** The susceptibility of a paramagnetic substance depends both on the temperature and strength of the magnetising field.

20. **(d)** current

**Explanation:** Capacitor is a device to store charge. It is used in appliances where more current is needed.

21. **(d)**  $\frac{-Q}{4}$ 

**Explanation:** 

The total force on one Q is

$$F=rac{kQ^2}{4a^2}+rac{kqQ}{a^2}$$

For the system to be in equilibrium F = 0

$$rac{kQ^2}{4a^2}+rac{kqQ}{a^2}=0 \ q=-rac{Q}{4}$$

22. **(d)** zero

Explanation: Here, the phase difference between current and e.m.f.,

$$\phi = \pi/2$$

$$\therefore P_{av} = E_v I_v \cos \phi = E_v I_v \cos \pi/2 = 0$$

23. **(b)** 4H

Explanation: 
$$L=-rac{e}{rac{di}{dt}}=-rac{200}{rac{-5}{0.1}}=4H$$


24. **(b)** MB

Explanation: au = MBsin heta

$$au_{max} = MBsin90^o = MB$$

25. **(c)** 
$$\frac{I}{I_0} = \frac{1}{11}$$

**Explanation:** 



$$I = rac{I_o imes 2.5 \Omega}{(25 + 2.5)} = I_o imes rac{25}{275} = rac{1}{11} imes I_o 
onumber \ rac{ extsf{I}}{I_0} = rac{1}{11}$$

**Section B** 

26. **(a)** 
$$\frac{E^2}{2VB^2}$$

**Explanation:** For undeflected beam,  $v=rac{E}{B}$ 

Also, 
$$\frac{1}{2}mv^2 = eV$$

$$\Rightarrow v^2 = \frac{2eV}{m}$$

$$\therefore \frac{2eV}{m} = \frac{E^2}{B^2}$$
or  $\frac{e}{m} = \frac{E^2}{2VB^2}$ 

27. **(d)** 
$$\frac{1}{4\pi\varepsilon_0} \frac{2q}{L} \left(1 - \frac{1}{\sqrt{5}}\right)$$

Explanation: 
$$V=rac{q}{4\piarepsilon_0}\left[rac{1}{L}+rac{1}{L}-rac{1}{\sqrt{5}L}-rac{1}{\sqrt{5}L}
ight] =rac{2q}{4\piarepsilon_0L}\left[1-rac{1}{\sqrt{5}}
ight]$$

28. **(b)** 2:1

**Explanation:** When the two conducting spheres touch each other there will be a flow of charge until they both have the same potential. Let  $R_1$  and  $R_2$  be the radii of spheres 1 and 2, respectively. Let  $Q_1$  and  $Q_2$  be the charges on spheres 1 and 2, respectively, after they are separated.

Let the common potential=V,

$$Q_1 = 4\pi \in_o R_1 \ Q_2 = 4\pi \in_o R_2$$

$$R_1 = 10cm$$

$$R_2 = 20cm$$

Surface charge density on sphere 1, $\sigma_1=rac{Q_1}{4\pi R_1^2}$ 

Surface charge density on sphere 2,  $\sigma_2 = \frac{Q_2}{4\pi R_2^2}$ 

$$rac{\sigma_1}{\sigma_2}=rac{Q_1}{Q_2} imesrac{R_2^2}{R_1^2}$$

$$rac{\sigma_1}{\sigma_2} = rac{R_1}{R_2} imes rac{R_2^{\frac{1}{2}}}{R_1^2}$$
 $rac{\sigma_1}{\sigma_2} = rac{R_2}{R_1}$ 
 $rac{\sigma_1}{\sigma_2} = rac{20}{10}$ 

$$\frac{\sigma_1}{\sigma_2} = \frac{R_2}{R_1}$$

$$\frac{\sigma_2}{\sigma_1} = \frac{R_1}{20}$$

$$\sigma_1:\sigma_2=2:1$$

29. **(b)** 
$$3.2 \times 10^{-3}$$
 A,  $0.16$  A

Explanation: 
$$\frac{I_1}{I_2} = \frac{3.2 \times 10^{-3}}{0.16} = \frac{1}{50} = \frac{10}{500} = \frac{N_2}{N_1}$$

**Explanation:** The direction of induced emf changes after every half revolution i.e., twice per revolution.

Explanation: 
$$B=rac{H_E}{cos\delta}=rac{0.26}{0.5}=0.52~G$$

Explanation: 
$$\varepsilon = -\frac{\phi_2 - \phi_1}{t}$$

Explanation: 
$$arepsilon=-rac{\phi_2-\phi_1}{t}$$
  $125 imes10^{-3}=-rac{0-1 imes0.5 imes0.5 imes0.5 imes0.6(90^\circ- heta)}{0.1}$ 

$$125 imes 10^{-3} = 0.50 imes 0.50 imes \sin heta$$

$$\sin \theta = \frac{125 \times 10^{-3}}{0.50 \times 0.50} = \frac{1}{2}$$
$$\theta = 45^{\circ}$$

$$\theta=45^{\circ}$$

#### 33. (a) increase in the average collision time

Explanation: Mobility,

$$\mu = \frac{q\tau}{m}$$
 i.e.,  $\mu \propto \tau$ 

34. **(a)** 
$$12 \times 10^{-4}$$
 J

Explanation: 
$$\Delta U = U_2 - U_1 = \frac{1}{2} C \left(V_2^2 - V_1^2\right) = \frac{1}{2} imes 8 imes 10^{-6} \left(20^2 - 10^2\right)$$

$$=rac{1}{2} imes 8 imes 10^{-6} \left(20^2-10^2
ight.$$

= 4 
$$\times$$
 10<sup>-6</sup>  $\times$  300 J = 12  $\times$  10<sup>-4</sup> J

**Explanation:** H = 
$$\frac{V^2t}{JR}$$
 cal

$$\frac{t}{R} = \frac{HJ}{V^2}$$
 = constant

$$\therefore$$
 R = kt and R  $\propto$  t  $\Rightarrow$  t  $\propto$  l

$$t_2=rac{90}{100} imes 16~ ext{min}$$
 = 14.4 min

#### 36. (c) 193 Hz

$$L = 9.5 \text{ mH}$$

$$i = 3.9 A$$

$$V=iX_L=i imes \omega L=i imes 2\pi f L$$

Frequency of the source, 
$$f=rac{V}{i imes2\pi L}=rac{45}{3.9 imes2 imes3.14 imes9.5 imes10^{-3}}=0.193 imes10^3$$
 = 193Hz

Explanation: 
$$\varepsilon_0 = NBA\omega = 30 \times 1 \times 400 \times 10^{-4} \times \left(1800 \times \frac{2\pi}{60}\right)$$

38. (c) 300A/m, 1.88T

**Explanation:** H = nI =  $60 \times 5 = 300$ A/m

B = 
$$\mu_o \mu_r H = \mu_m H$$

= 5000 
$$imes$$
 300  $imes$   $4\pi imes$   $10^{-7}$ 

= 1.88 T

39. (a)  $Q/\sqrt{2}$ 

> **Explanation:** Let C be the capacitance of the capacitor, when the energy is stored equally between the electric and magnetic fields. Then,

$$U_C=rac{Q^2}{2\ C}$$

Let Q' be the charge on the capacitor, when the energy is stored equally between the electric and magnetic fields. Then,

$$U_C'=rac{U_C}{2}$$

or 
$$\frac{Q^{\prime 2}}{2C} = \frac{1}{2} \times \frac{Q^2}{2C}$$
  
or  $Q' = Q/\sqrt{2}$ 

or Q' = 
$$Q/\sqrt{2}$$

(a) 1.6 volt/m 40.

> **Explanation:** If the battery has an e.m.f E, resistance of the potentiometer is R and the internal resistance of the battery is r, then the current I flowing in the potentiometer wire is given as,

$$I = \frac{E}{(R+r)}$$

$$I=rac{2}{(4+1)}$$

I = 0.4A

The potential difference V across the potentiometer,

$$V = I \times R$$

$$\Rightarrow V = 0.4 \times 4$$

$$V = 1.6V$$

The potential gradient = ( potential drop across the potentiometer)/ length of the potentiometer wire)

$$=\frac{V}{l}$$

$$=\frac{1.6}{1}$$

⇒ Potential gradient = 1.6V/m

**(b)** 1000 Wh 41.

Explanation: 
$$H = \frac{V^2 t}{R} = \frac{200 \times 200 \times 2 \times 60 \times 60}{80} J$$
  
=  $\frac{200 \times 200 \times 2 \times 60 \times 60}{80 \times 2600} W = 1000 Wh$ 

42. (c)  $1.88 \times 10^5 \text{Nm}^2/\text{C}$ 

**Explanation:** The square can be considered as one face of a cube of edge 10 cm with a center where charge q is placed.

According to Gauss's theorem for a cube, total electric flux  $\phi=rac{q}{\epsilon_0}$  is through all its six faces.

Since the charge lies at the center of cube, so by symmetry flux through each of the 6 faces will be equal.

Hence, electric flux through one face of the cube i.e., through the square,  $\phi = \frac{q}{66\pi}$ 

Where,  $\in_0$  = Permittivity of free space = 8.854  $\times$  10<sup>-12</sup> N<sup>-1</sup>C<sup>2</sup> m<sup>-2</sup>

charge is given by ; q = 10 
$$\mu$$
C = 10  $\times$  10<sup>-6</sup> C = 10<sup>-5</sup> C   
  $\therefore \phi = \frac{q}{6 \in_0} = \frac{10 \times 10^{-6}}{6 \times 8.854 \times 10^{-12}} = 1.88 \times 10^5 Nm^2 C^{-1}$ 

43. (c)  $0.015 \Omega$ 

> **Explanation:** The value of each division is 20 $\mu$ A. The range of the galvanometer  $I_g=20 imes30=600\mu A$ To convert it into an ammeter of range I = 1A, a shunt S is connected in parallel to it.

$$S = rac{I_g}{I - I_g} G = rac{600 imes 10^{-6}}{1 - 600 imes 10^{-6}} imes 25 = 0.015 \Omega$$

44. (c) poles

**Explanation:** The angle of dip is 90° at poles.

45. **(b)** Both A and R are true but R is not the correct explanation of A.

Explanation: Both A and R are true but R is not the correct explanation of A.

46. (d) A is false and R is also false

**Explanation:** The earth has only a vertical component of its magnetic field at the magnetic poles and the compass needle is only free to rotate in a horizontal plane. At the north pole, the vertical component of the earth's magnetic field will exert torque on the magnetic needle so as to align it along its direction. As the compass needle cannot rotate in a vertical plane, it will rest horizontally when placed on the magnetic pole of the earth.

47. **(b)** Both A and R are true but R is not the correct explanation of A.

Explanation: Both A and R are true but R is not the correct explanation of A.

48. **(c)** A is true but R is false.

**Explanation:** When ac flows through an inductor current lags behind the emf., by phase of  $\frac{p}{2}$ , inductive reactance,  $X_L = \omega L = \pi.2f.L$ , so when frequency increases correspondingly inductive reactance also increases.

49. **(c)** A is true but R is false.

Explanation: A is true but R is false.

### **Section C**

50. **(c)** in the direction of the electric field

**Explanation:** Atomic dipoles in a dielectric experience a torque when placed in an external electric field. As a result of this torque, they align themselves in the direction of the electric field, since this is the position of least potential energy. This phenomenon in which the atomic dipoles align themselves in the diorection of the electric field is called dielectric polarization.

51. **(c)** 16

Explanation: 
$$F = \frac{1}{4\pi\varepsilon_0} \cdot \frac{q_1q_2}{r^2}$$

$$F' = \frac{1}{4\pi\varepsilon_0} \cdot \frac{2q_1 \times 2q_2}{(r/2)^2} = 16 F$$

$$\therefore n = 16$$

52. **(d)**  $[ML^2T^{-3}A^{-2}]$ 

**Explanation:** [ML<sup>2</sup>T<sup>-3</sup>A<sup>-2</sup>]

53. **(c)**  $2 \times 10^6 \Omega$ 

**Explanation:** R = 
$$\frac{V}{I} = \frac{2}{10^{-6}}$$
 = 2 × 10<sup>6</sup>  $\Omega$ 

54. **(b)** none of these

**Explanation:** Specific resistance depends upon the nature of material and is independent of mass and dimensions of the material.

55. **(c)** a straight line

Explanation: a straight line