

Topics : Newton's Law of Motion, Projectile Motion, Friction

Type of Questions

Single choice Objective ('-1' negative marking) Q.1 to Q.6

(3 marks, 3 min.)

M.M., Min.

[18, 18]

Multiple choice objective ('-1' negative marking) Q.7

(4 marks, 4 min.)

[4, 4]


1. System is shown in the figure and man is pulling the rope from both sides with constant speed 'u'. Then the speed of the block will be:

(A) $\frac{3u}{4}$

(B) $\frac{3u}{2}$

(C) $\frac{u}{4}$

(D) none of these



2. Hailstones falling vertically with a speed of 10 m/s, hit the wind screen (wind screen makes an angle 30° with the horizontal) of a moving car and rebound elastically. The velocity of the car if the driver finds the hailstones rebound vertically after striking is :


(A) $10\sqrt{3}$ m/s

(B) $20\sqrt{3}$ m/s

(C) 10 m/sec

(D) $\frac{10}{\sqrt{3}}$ m/sec

3. In the shown arrangement if f_1 , f_2 and T be the frictional forces on 2 kg block, 3kg block & tension in the string respectively, then their values are:




(A) 2 N, 6 N, 3.2 N

(B) 2 N, 6 N, 0 N

(C) 1 N, 6 N, 2 N

(D) data insufficient to calculate the required values.

4. Two blocks A and B are placed in contact on a horizontal surface. Faces of blocks A and B, which are in contact, are inclined at 30° with the horizontal, as shown. There is no friction between block A and any surface which is in contact with this whereas friction coefficient between block B and the surface is $\frac{1}{\sqrt{3}}$. A force F is applied in horizontal direction on block A. What is the minimum value of F at which the block B just start moving rightwards?

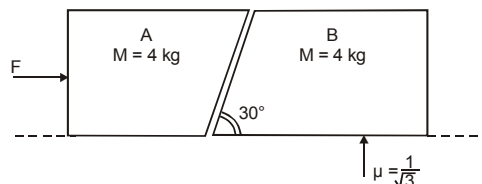


(A) $\frac{40}{\sqrt{3}}$ N

(B) $\frac{80}{\sqrt{3}}$ N



(C) 100 N

(D) For any value of F , motion will not start


5. A block of mass 2 kg is given a push for a moment horizontally and then the block starts sliding over a horizontal plane. The graph shows the velocity-time graph of the motion. The co-efficient of sliding friction between the plane and the block is:



- (A) 0.02 (B) 0.20
(C) 0.04 (D) 0.40
6. A weight W is supported by two strings inclined at 60° and 30° to the vertical. The tensions in the strings are T_1 & T_2 as shown. If these tensions are to be determined in terms of W using a triangle of forces, which of these triangles should you draw? (block is in equilibrium)

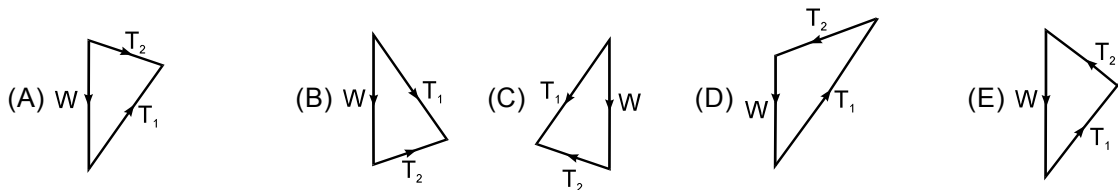

7. An arrangement of the masses and pulleys is shown in the figure. Strings connecting masses A and B with pulleys are horizontal and all pulleys and strings are light. Friction coefficient between the surface and the block B is 0.2 and between blocks A and B is 0.7. The system is released from rest. (use $g = 10 \text{ m/s}^2$)

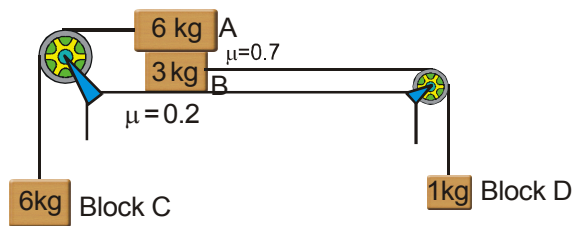

- (A) The magnitude of acceleration of the system is 2 m/s^2 and there is no slipping between block A and block B.
(B) The magnitude of friction force between block A and block B is 42 N.
(C) Acceleration of block C is 1 m/s^2 downwards.
(D) Tension in the string connecting block B and block D is 12 N.

Answers Key

DPP NO. - 31

1. (A) 2. (A) 3. (C) 4. (D) 5. (B)
6. (E) 7. (A)(D)

Hint & Solutions

DPP NO. - 31

$$1. \quad u = \frac{0 + v_1}{2}, \quad \frac{v_1 + v_2}{2} = v, \quad \frac{-v_2 + u}{2} = v$$

$$\text{Hence } v = \text{velocity of } M = \frac{3u}{4}.$$


2. For the driver to observe the rain move vertically upward after the elastic collision, rain should come at an angle 30° with the horizontal (as clear from figure).

Let, velocity of rain w.r.t. car be $V_{m/c}$

$$\vec{V}_{R/G} = \vec{V}_{R/C} + \vec{V}_{C/G}$$

$$\vec{V}_{R/G(x)} = \vec{V}_{R/C(x)} + \vec{V}_{C/G(x)}$$

But $\vec{V}_{R/G(x)} = 0$, since rain fall vertically down.

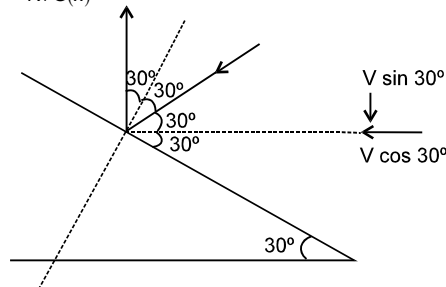

$$\Rightarrow \vec{V}_{C/G(x)} = -\vec{V}_{R/C(x)} = -(V \cos 30^\circ)$$

$$\Rightarrow |\vec{V}_{C/G(x)}| = V \cos 30^\circ \dots\dots(i)$$

$$\text{Now, } \vec{V}_{R/G(y)} = \vec{V}_{R/C(y)}$$

$$\Rightarrow -10 = -V \sin 30^\circ + 0$$

[Since ; $V_{R/G(y)} = -10 \text{ m/s}$; $V_{C/G(y)} = 0$]


$$\Rightarrow V \sin 30^\circ = 10 \Rightarrow V = 20 \text{ m/s.}$$

Substituting $V = 20 \text{ m/s}$ in equation (i)


$$\vec{V}_{C/G(x)} = V \cos 30^\circ = 20 \times \frac{\sqrt{3}}{2} = 10\sqrt{3} \text{ m/s.}$$

$$\therefore \vec{V}_{C/G} = 10\sqrt{3} \hat{i} \text{ m/s.}$$

3. (C) FBD



Net force without friction on system is '7N' in right side so first maximum friction will come on 3 kg block.



So $f_1 = 1 \text{ N}$, $f_2 = 6 \text{ N}$, $T = 2 \text{ N}$

$f_1 = 1 \text{ N}$, $f_2 = 6 \text{ N}$, $T = 2 \text{ N}$


4. $F = N \sin \theta$ $N = \frac{F}{\sin \theta}$

$$N \sin \theta = \mu (N \cos \theta + mg)$$

$$F = \mu (F \cot \theta + mg)$$

$$F (1 - \mu \cot \theta) = \mu mg$$

$$F = \frac{\mu mg}{1 - \mu \cot \theta}$$

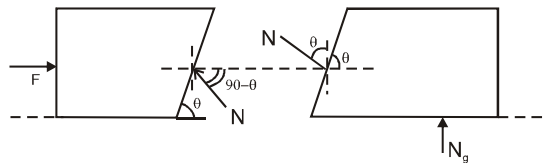

On putting $\mu = \frac{1}{\sqrt{3}}$ and $\theta = 30^\circ$

$$\mu = \frac{1}{\sqrt{3}} \quad \theta = 30^\circ$$

$$F = \infty$$

Therefore motion will not start for any value of F.

5. The magnitude of deceleration from graph is


$$a = \frac{8-0}{4-0} = 2 \text{ m/s}^2$$

The deceleration of block is

$$a = \mu g \quad \therefore \mu = \frac{a}{g} = 0.2$$

6. $\vec{AB} = \vec{W}$, $\vec{BC} = \vec{T}_1$, $\vec{CA} = \vec{T}_2$

$$\vec{AB} + \vec{BC} + \vec{CA} = 0$$

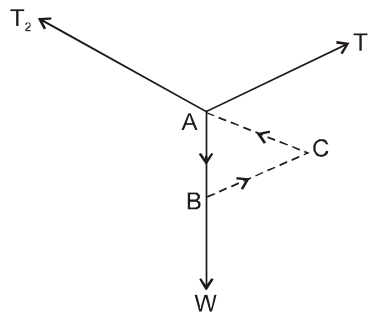

Ans. (E)

7. Suppose blocks A and B move together. Applying NLM on C, A + B, and D

$$60 - T = 6a$$

$$T - 18 - T' = 9a$$

$$T' - 10 = 1a$$

$$\text{Solving } a = 2 \text{ m/s}^2$$

To check slipping between A and B, we have to find friction force in this case. If it is less than limiting static friction, then there will be no slipping between A and B.

Applying NLM on A.

$$T - f = 6(2)$$

$$\text{as } T = 48 \text{ N}$$

$$f = 36 \text{ N}$$

and $f_s = 42 \text{ N}$ hence A and B move together.

and तथा $T' = 12 \text{ N}$.